ADDENDUM NO. 2

February 17, 2020

KALAMAZOO PUBLIC SCHOOLS – CENTRAL HIGH SCHOOL PIPING REPLACEMENT

TO: ALL BIDDERS OF RECORD

This Addendum forms a part of and modifies the Bidding Requirements, Contract Forms, Contract Conditions by The Skillman Corporation and the Specifications and the Drawings by TowerPinkster, dated December 18, 2019. Acknowledge receipt of the Addendum in the space provided on the Proposal Form. Failure to do so may subject the Bidder to disqualification.

This Addendum consists of pages ADD 2-1, dated February 17, 2020, Tower Pinkster Addendum No. 1, dated February 17, 2020, consisting of 5 pages, and issued Guideline Schedule.

A. Specification Section 01 32 00 – Schedules and Reports

Insert Guideline Schedule dated February 17, 2020, included with this Addendum.



ADDENDUM NO. 1

DATE OF ISSUANCE: February 17, 2020

PROJECT: Kalamazoo Central High School Piping Replacement

Kalamazoo, MI

OWNER: Kalamazoo Public Schools

ARCHITECT'S PROJECT NO.: 18-537

ORIGINAL BID ISSUE DATE: December 18, 2019

SCOPE OF WORK

This Addendum includes changes to, or clarifications of, the original Bidding Documents and any previously issued addenda, and shall be included in the Bid. All of these Addendum items form a part of the Contract Documents. The Bidder shall acknowledge receipt of this Addendum in the appropriate space provided on the Bid Form. Failure to do so may result in disqualification of the Bid.

DOCUMENTS INCLUDED IN THIS ADDENDUM

This Addendum includes **5** pages of text and the following documents:

Bidding Documents: NoneContract Conditions: NoneSpecification Sections: None

• Drawings: None

CHANGES TO PREVIOULSY ISSUED ADDENDA

None.

CHANGES TO BIDDING REQUIREMENTS

None.

CHANGES TO CONTRACT CONDITIONS

None.

CHANGES TO SPECIFICATIONS

None.



2.17.2020 Addendum No. 1 // Kalamazoo Central High School Piping Replacement // 18-537

CHANGES TO DRAWINGS

ADD-1 Item No. D-1 - Revise Size of Cold Water Feeding Boys Locker Area

Refer to Sheet: P101F

Revise the size of the 6" cold water line feeding the Men's Locker room area to 4" (approximately 40').

ADD-1 Item No. D-2 - Add Shut-off Valves

Refer to Sheet: P101F

Add three shut-off valves in the tunnel. The existing piping shall terminate that these new valves. New piping shall extend beginning at these valves. Valves shall be located upstream of piping branch that feeds the Women's Locker room area.

ADD-1 Item No. D-3 - Existing Copper Pipe to Remain

Refer to Sheet: P102F and the attached photos.

An approximate 20' length of the 1-1/4" HW and 2" CW feeding the South end of the Men's Locker was replaced with copper pipe in 2018. At the contractors option this piping may be reused 0R replaced with new. Note that this piping is currently installed in Storage 709 where no ceiling exists.

The HRW piping shall be replaced as indicated however it shall be located in 709 Storage.

2

TowerPinkster

2.17.2020 Addendum No. 1 // Kalamazoo Central High School Piping Replacement // 18-537






TowerPinkster

2.17.2020 Addendum No. 1 // Kalamazoo Central High School Piping Replacement // 18-537



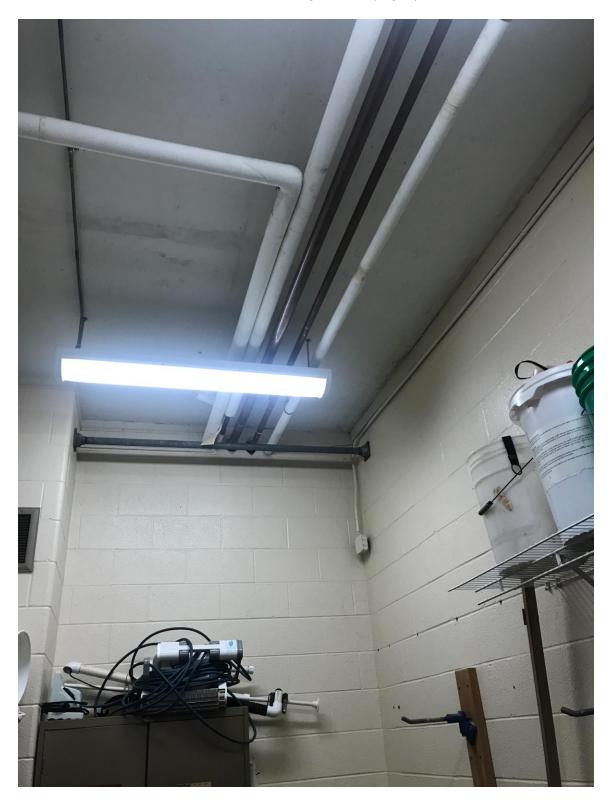



2.17.2020 Addendum No. 1 // Kalamazoo Central High School Piping Replacement // 18-537

5

ADD-1 Item No. D-4 - Eliminate Water Feed to Second Floor Drinking Fountains

Refer to Sheet: P102F

Do not install the cold water feed to the drinking fountains in the corridor. Provide a single $\frac{3}{4}$ " Tee with a valve and cap for a future pair of electric water coolers.

END OF ADDENDUM.

			OCOC
Activity Name	Original Start	Finish	SOSO
	Duration		February March April May June July August Septe
			03 10 17 24 02 09 16 23 30 06 13 20 27 04 11 18 25 01 08 15 22 29 06 13 20 27 03 10 17 24 31 0
KPS - Kalamazoo Central Piping	117 20-Feb-20	31-Jul-20	KPS - Kalamazoo Central Pining
PROJECT ADMINISTRATION	26 20-Feb-20	27-Mar-20	PROJECTADMINISTRATION
BID PHASE	1 20-Feb-20	20-Feb-20	BIDPHASE
Bids Due Opening	0	20-Feb-20	◆ Bids Due Opening
Bid Tab Published	0	20-Feb-20	Bid Tab Published:
POST-BID PHASE	15 20-Feb-20	12-Mar-20	POST-BID PHASE
KPS-TP-TSC Post Bid Interviews	2 20-Feb-20	21-Feb-20	KPS-TP-TSC Post Bid Interviews
TSC Recommendation to KPS	0	24-Feb-20	TSC Recommendation to KPS
KPS BOE Meeting to Award Contracts	0 12-Mar-20*		KPS BOE Meeting to Award Contracts
PRE-CONSTRUCTION PHASE	10 13-Mar-20	27-Mar-20	PRE-CONSTRUCTION PHASE
Notice to Proceed	0 13-Mar-20		Notice to Proceed
Pre-Construction Meeting	0 27-Mar-20		uction Meeting
CONSTRUCTION PHASE 1 (2020)	36 12-Jun-20	31-Jul-20	CONCO
BUILDING REMODEL	36 12-Jun-20	31-Jul-20	RUII DING REMODEL
Last Day of School (Students)	0 12-Jun-20*		Last Day of School (Students)
Construction Commencement	0 22-Jun-20*		. Popstruction Commencement
Select Piping and Block Demolition	9 23-Jun-20	03-Jul-20	Select Pining and Block Demolific
Piping Installation & Insulation	10 06-Jul-20	17-Jul-20	Piono Installation & Insula
Ceiling Re-installation	5 06-Jul-20	10-Jul-20	Ceiling Re-installation
Block Rework	5 20-Jul-20*	24-Jul-20	Block Rework
Patting	3 27-Jul-20*	29-Jul-20	- Paiting
Final Cleaning	3 29-Jul-20*	31-Jul-20	Final Cleaning

KPS - Kalamazoo Central Piping Guideline Schedule 20-Feb-20



Primary Baseline
Actual Work
A Remaining Work
Critical Remaining Work

Milestone